




coupling

SHSS304 SERIES

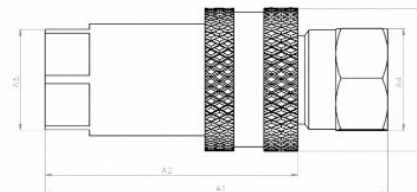

					MIN. BURST PRESSURE						FORCE TO CONNECT		THREAD SIZE	DIMENSIONS(mm)				
PRODUCT CODE	ISO SIZE		MAX. WORKING PRESSURE		FMALE		MALE		CONNECTED									
	mm	inch	BAR	Mpa	BAR	Mpa	BAR	Mpa	BAR	Mpa	N	Kg		A1	A2	A3	A4	A5
SHSS30414	6.3	1/4"	350	35	1400	140	1450	145	1350	135	50	5	1/4" BSP	74.5	55	30	19	20
SHSS30415	10	3/8"	330	33	1350	135	1400	140	1350	135	75	7.5	3/8" BSP	80	60.5	38	22	25
SHSS30416	12.5	1/2"	320	32	1250	125	1300	130	1250	125	90	9	1/2" BSP	92.5	68	40	27	27
SHSS30417	20	3/4"	280	28	1150	115	1150	115	1100	110	155	15.5	3/4" BSP	110.5	82.5	50	36	34
SHSS30418	25	1"	250	25	950	95	950	95	900	90	190	19	1" BSP	132.5	100	58	41	41
SHSS30419	31.5	1 1/4"	230	23	900	90	950	95	850	85	310	31	1 1/4" BSP	150.5	117	70	50	55
SHSS30420	40	1 1/2"	230	23	800	80	750	75	750	75	350	35	1 1/2" BSP	167.5	133	85	65	65
SHSS30421	50	2"	230	23	600	60	550	55	550	55	450	45	2" BSP	194	156.5	105	72	80

E-mail: sales@shflex.com

[Http://shflex.com](http://shflex.com)