




coupling
SHS SERIES

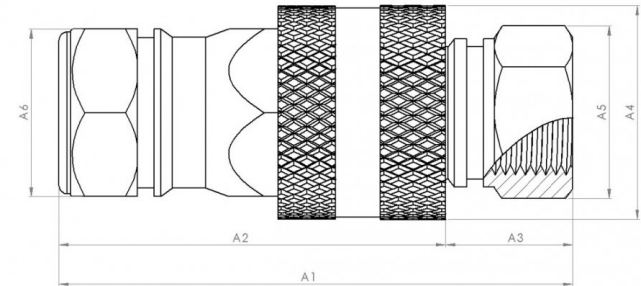

PRODUCT CODE	ISO SIZE		MAX. WORKING PRESSURE		MIN. BURST PRESSURE						FORCE TO CONNECT		THREAD SIZE	DIMENSIONS(mm)				
					FMALE		MALE		CONNECTED					A1	A2	A3	A4	A5
	mm	inch	BAR	Mpa	BAR	Mpa	BAR	Mpa	BAR	Mpa	N	Kg						
SHS14	6/3	1/4"	350	35	1400	140	1450	145	1350	135	50	5	1/4" BSP	74/5	55	30	19	20
SHS15	10	3/8"	330	33	1350	135	1400	140	1350	135	75	7/5	3/8" BSP	80	60/5	36	22	25
SHS16	12/5	1/2"	320	32	1250	125	1300	130	1250	125	90	9	1/2" BSP	92/5	68	38	27	27
SHS17	20	3/4"	280	28	1150	115	1150	115	1100	110	155	15/5	3/4" BSP	111	82/5	47	36	34
SHS18	25	1"	250	25	950	95	950	95	900	90	190	19	1" BSP	133	100	56	41	41
SHS19	31/5	1 1/4"	230	23	900	90	950	95	850	85	310	31	1 1/4" BSP	151	177	69	50	55
SHS20	40	1 1/2"	230	23	800	80	750	75	750	75	350	35	1 1/2" BSP	168	133	82	65	65
SHS21	50	2"	230	23	600	60	550	55	550	55	450	45	2" BSP	194	156/5	101	72	80

E-mail: sales@shflex.com
 Http://shflex.com